



HEWLETT
PACKARD

**150 WATT ELECTRONIC LOAD MODULE
HP MODEL 60501A**

**FOR MODULES WITH SERIAL NUMBERS:
2910A-00101 AND ABOVE**

150-Watt Module

About This Manual

This manual provides information for the HP 60501A 150-Watt Electronic Load Module. It is designed as a supplement to the the HP 6050A/6051A Multiple Input Electronic Load Operating Manual (part number 06050-90001). Four tables provide the following module-specific information:

Table 60501-1 provides detailed specifications.

Table 60501-2 lists the ranges that can be programmed in constant current, constant resistance, and constant voltage modes. It shows the maximum and minimum programming values for each range. Refer to this table when programming the module locally as described in chapter 4, or remotely as described in chapter 5 of the operating manual.

Table 60501-3 gives the factory default values of the module. Unless you have saved your own wake-up settings, the module will be set to the factory default values whenever power is applied. See chapter 4 in the operating manual.

Table 60501-4 provides calibration information for the module. This information is needed to perform the annual calibration procedure described in chapter 6 of the operating manual.

Module Installation and Operation

Except for the module-specific information in this manual, all installation, operation, and calibration instructions are given in the Electronic Load Operating Manual. The HP Electronic Load Family Programming Reference Manual (part number 06060-90005) contains complete programming details that apply to all Electronic Load models.

Note that in addition to this manual, a 10-pin connector plug is also shipped with your Electronic Load module. Refer to chapter 3 in the operating manual for more information.


Table 60501-1. Specifications
(Specifications apply for 25°C ±5°C, except as noted)

DC Input Rating:


Current: 0 to 30 A

Voltage: 3 to 60 V (minimum dc operation from 0 to 2 V for 0 to 30 A)


Power: 150 W at 40°C (derated to 112 W at 55°C)

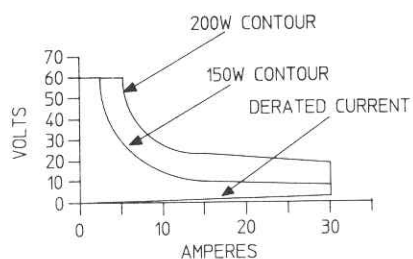

A. OPERATING CHARACTERISTICS

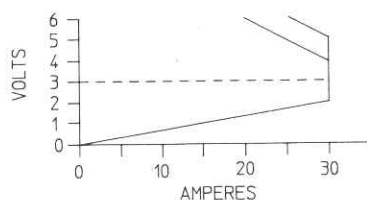

B. DERATED CURRENT DETAIL

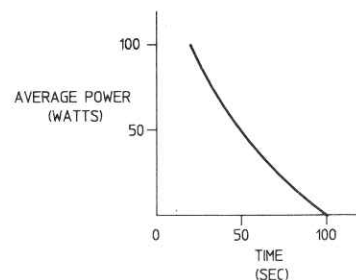

EXTENDED POWER AVAILABILITY AT 25°C

Constant Current Mode:

Ranges: 0 to 3 A; and 0 to 30 A

Accuracy: (after 30 second wait): $\pm 0.1\% \pm 40$ mA (both ranges)

Resolution: 0.8 mA (3 A range); 8 mA (30 A range)

Regulation: 10 mA (both ranges)

Temperature Coefficient: 100 ppm/°C ± 3 mA/°C (both ranges)

Constant Resistance Mode:

Ranges: 0.067 to 2 Ω ; 2 Ω to 2 k Ω ; and 20 Ω to 10 k Ω

Accuracy: $\pm 0.8\% \pm 16$ m Ω with ≥ 6 A at input (2 Ω range);

$\pm 0.3\% \pm 5$ mS with ≥ 6 V at input (2 k and 10 k Ω ranges)

Resolution: 0.54 m Ω (2 Ω range); 0.14 mS (2 k Ω range); 0.014 mS (10 k Ω range)

Regulation: 10 mV with remote sensing (2 Ω range); 10 mA (2 k and 10 k Ω ranges)

Temperature Coefficient: 800 ppm/°C ± 0.8 m Ω /°C (2 Ω range);

300 ppm/°C ± 0.5 mS/°C (2 k and 10 k Ω ranges)

Constant Voltage Mode:

Range: 0 to 60 V

Accuracy: $\pm 0.1\% \pm 50$ mV

Resolution: 16 mV

Regulation: 5 mV (remote sense); 40 mV (local sense)

Temperature Coefficient: 100 ppm/°C ± 5 mV/°C

Transient Operation:

Continuous Mode

Frequency Range: 0.25 Hz to 10 kHz

Frequency Resolution: 4%

Frequency Accuracy: 3%

Table 60501-1. Specifications (continued)

Continuous Mode (continued)

Duty Cycle Range: 3% to 97% (0.25 Hz to 1 kHz); 6% to 94% (1 kHz to 10 kHz)

Duty Cycle Resolution: 4%

Duty Cycle Accuracy: 6% of setting $\pm 2\%$

Pulsed Mode

Pulse Width: 50 μs $\pm 3\%$ minimum; 4 s $\pm 3\%$ maximum

Transient Current Level (0 to 3 A and 0 to 30 A ranges):

Resolution: 13 mA (3 A range); 130 mA (30 A range)

Accuracy: $\pm 0.1\% \pm 40$ mA (3 A range); $\pm 0.1\% \pm 200$ mA (30 A range)

Temperature Coefficient: 100 ppm/ $^{\circ}\text{C}$ ± 5 mA/ $^{\circ}\text{C}$

Transient Resistance Level (0.067 to 2 Ω , 2 Ω to 2 k Ω , and 20 Ω to 10k Ω ranges):

Resolution: 8.6 m Ω (2 Ω range); 2.1 mS (2 k Ω range); 0.2 mS (10 k Ω range)

Accuracy: $\pm 0.8\% + 16$ m Ω with ≥ 3 A at input (2 Ω range)

$\pm 0.3\% + 5$ mS with ≥ 6 V at input (2 k Ω range)

$\pm 0.3\% + 5$ mS with ≥ 6 V at input (10 k Ω range)

Transient Voltage Level (0 to 60 V):

Resolution: 260 mV

Accuracy: $\pm 0.1\% \pm 300$ mV

Temperature Coefficient: 150 ppm/ $^{\circ}\text{C}$ ± 5 mV/ $^{\circ}\text{C}$

Programmable Slew Rate (For any given input transition, the time required will be either the total slew time or a minimum transition time, whichever is longer. The minimum transition time increases when operating with input currents under 1 A. The following are typical values; $\pm 25\%$ tolerance):

Current Slew Rate:*

Rate #	30 A Range Step	3 A Range Step	Transition Time
1	0.5 A/ms	0.05 A/ms	8.0 ms
2	1.2 A/ms	0.12 A/ms	3.2 ms
3	2.5 A/ms	0.25 A/ms	1.6 ms
4	5 A/ms	0.5 A/ms	800 μs
5	12 A/ms	1.2 A/ms	320 μs
6	25 A/ms	2.5 A/ms	160 μs
7	0.05 A/ μs	5 A/ms	80 μs
8	0.12 A/ μs	12 A/ms	32 μs
9	0.25 A/ μs	25 A/ms	16 μs
10	0.5 A/ μs	0.05 A/ μs	12 μs
11	1.2 A/ μs	0.12 A/ μs	12 μs
12	2.5 A/ μs	0.25 A/ μs	12 μs

*AC performance specified from 3 to 60 V.

Table 60501-1. Specifications (continued)

Voltage Slew Rate:

Rate #	Voltage Range Step	Transition Time*
1	1 V/ms	8.0 ms
2	2.5 V/ms	3.2 ms
3	5 V/ms	1.6 ms
4	10 V/ms	800 μ s
5	25 V/ms	320 μ s
6	50 V/ms	160 μ s
7	0.1 V/ μ s	85 μ s
8	0.25 V/ μ s	85 μ s
9	0.5 V/ μ s	85 μ s

*Transition time based on low capacitance current source.

Resistance Slew Rate (2 Ω range): Uses the value programmed for voltage slew rate.

Resistance Slew Rate (2 k and 10 k Ω ranges): Uses the value programmed for current slew rate.

Current Readback:

Resolution: 9 mA (via HP-IB); 10 mA (front panel)

Accuracy (after 30 minute wait): $\pm 0.06\%$ ± 40 mA

Temperature Coefficient: 65 ppm/ $^{\circ}$ C ± 3 mA/ $^{\circ}$ C

Voltage Readback:

Resolution: 17 mV (via HP-IB); 20 mV (front panel)

Accuracy: $\pm 0.05\%$ ± 45 mV

Temperature Coefficient: 50 ppm/ $^{\circ}$ C ± 1.2 mV/ $^{\circ}$ C

Maximum Readback Capability: 65 to 70 V (typical)

Power Readback:

Accuracy: $\pm 0.2\%$ ± 2 W

External Analog Programming 0 to 10 V (dc or ac):

Bandwidth: 10 kHz (3 db frequency)

Accuracy: $\pm 4.5\%$ ± 40 mA (0 to 3 A range)

$\pm 4.5\%$ ± 130 mA (0 to 30 A range)

$\pm 0.8\%$ ± 200 mV (0 to 60 V range)

Temperature Coefficient: 100 ppm/ $^{\circ}$ C ± 3 mA/ $^{\circ}$ C (current ranges)

100 ppm/ $^{\circ}$ C ± 1 mV/ $^{\circ}$ C (voltage range)

External Current Monitor (0 to 10 V):

Accuracy: $\pm 4\%$ ± 40 mA (referenced to analog common)

Temperature Coefficient: 60 ppm/ $^{\circ}$ C ± 3 mA/ $^{\circ}$ C

Table 60501-1. Specifications (continued)

External Voltage Monitor (0 to 10 V):

Accuracy: $\pm 0.25\% \pm 40$ mV (referenced to analog common)

Temperature Coefficient: 50 ppm/ $^{\circ}\text{C}$ ± 0.2 mV/ $^{\circ}\text{C}$

Remote Sensing: 5 Vdc maximum between sense and input binding posts

Maximum Input Levels:

Current: 30.6 A (programmable to lower limits)

Voltage: 75 V

Minimum Operating Voltage: 2 V (derated to 0 V at 0 A)

Programmable Short Circuit: 0.066 Ω (0.04 Ω typical)

Programmable Open Circuit: 20 k Ω (typical)

Drift Stability (over an 8 hour interval):

Current: $\pm 0.03\% \pm 5$ mA

Voltage: $\pm 0.01\% \pm 10$ mV

PARD (20 Hz to 10 MHz noise):

Current: 2 mA rms/20 mA p-p

Voltage: 5 mV rms

DC Isolation Voltage: ± 240 Vdc between + or - input binding post and chassis ground

Digital Inputs:

Vlo: 0.9 V maximum at $I_{lo} = -1$ mA

Vhi: 3.15 V minimum (pull-up resistor on input)

Digital Outputs:

Vlo: 0.72 V maximum at $I_{lo} = 1$ mA

Vhi: 4.4 V minimum at $I_{lo} = -20$ μA

Reverse Current Capacity: 50 A when unit is on; 20 A when unit is off

Weight: 3.2 kg (7 lbs.)

Table 60501-2. Programming Ranges

Function	Front Panel Key	Front Panel Display	HP-SL Command (Short Form)	Range of Values
Constant Current				
Set Range	Range	C:RNG value	"CURR:RANG value"	≥ 0 and ≤ 3 A > 3 A and ≤ 30 A
Low Range				
High Range				
Set Main Level	CURR	CURR value	"CURR value"	0 to 3 A 0 to 30 A
Low Range				
High Range				
Set Slew Rate	(shift) Slew	C:SLW value	"CURR:SLEW value"	0.00005 to 0.25 (A/ μ s) 0.0005 to 2.5 (A/ μ s)
Low Range				
High Range				
Set Transient Level	Tran Level	C:TIV value	"CURR:TLEV value"	same as main level
*Set Triggered Level			"CURR:TRIG value"	same as main level
Constant Resistance				
Set Range	Range	R:RNG value	"RES:RANG value"	≥ 0 and ≤ 2 Ω > 2 Ω and ≤ 2 k Ω > 2 k Ω and ≤ 10 k Ω
Low Range				
Middle Range				
High Range				
Set Main Level	RES	RES value	"RES value"	0 to 2 Ω 2 Ω to 2 k Ω 20 Ω to 10 k Ω
Low Range				
Middle Range				
High Range				
Set Slew Rate	(shift) Slew			
Low Range		V:SLW value	"VOLT:SLEW value"	same as voltage slew
Middle/High Range		C:SLW value	"CURR:SLEW value"	same as current slew
Set Transient Level	Tran Level	R:TIV value	"RES:TLEV value"	same as main level
*Set Triggered Level			"RES:TRIG value"	same as main level
Constant Voltage				
Set Main Level	VOLT	VOLT value	"VOLT value"	0 to 60 V
Set Slew Rate	(shift) Slew	V:SLW value	"VOLT:SLEW value"	0.001 to 0.5 (V/ μ s)
Set Transient Level	Tran Level	V:TIV value	"VOLT:TLEV value"	same as main level
*Set Triggered Level			"VOLT:TRIG value"	same as main level
Transient Operation				
Set Frequency	Freq	FREQ value	"TRAN:FREQ value"	0.25 Hz to 10 kHz
Set Duty Cycle	(shift) Dcycle	DCYCLE value	"TRAN:DCYC value"	3-97% (0.25 Hz-1 kHz) 6-94% (1 kHz-10 kHz)
*Set Pulse Width			"TRAN:TWID value"	0.00005 to 4 s
Trigger Operation				
*Set Trigger Period			"TRIG:TIM value"	0.000008 to 4 s
Current Protection				
*Set Current Level			"CURR:PROT value"	0 to 30.6 A
*Set Delay Time			"CURR:PROT:DEL value"	0 to 60 s

* Can only be programmed remotely via the HP-IB.

Table 60501-3. Factory Default Settings

Function	Setting	Function	Setting
CURR level	0 A	Mode (CC, CR, CV)	CC
CURR transient level	0 A	Input (on/off)	on
CURR slew rate	2.5 A/ μ s	Short (on/off)	off
CURR range	30 A	Transient operation (on/off)	off
*CURR protection (on/off)	off	**TRAN mode	continuous
*CURR protection level	30.6 A	(continuous, pulse, toggle)	
*CURR protection delay	15 s	TRAN frequency	1 kHz
RES level	2 k Ω	TRAN duty cycle	50%
RES transient level	2 k Ω	*TRAN pulse width	0.5 ms
RES range	2 k Ω	*TRIG source	hold
VOLT level	60 V	(bus, external, hold, timer, line)	
VOLT transient level	60 V	*TRIG period	0.001 s
VOLT slew rate	5 V/ μ s	*PORT0 output (on/off)	off (logic 0)
		*CAL mode (on/off)	off
* Can only be programmed remotely via the HP-IB.			
** Continuous transient mode is the only mode available at the front panel. Pulsed, toggled, and continuous modes can all be programmed remotely via the HP-IB.			

Table 60501-4. Calibration Information

Ranges and Calibration Points	Variables	Variable Values	Power Supply Settings	Current Shunt
High Current Range	Hi_curr_rng	30	5 V/31 A	100 A
High Current Hi point	Hi_curr_hipt	28		
High Current Lo point	Hi_curr_lopt	1		
Low Current Range	Lo_curr_rng	3	5 V/10 A	10 A
Low Current Hi point	Lo_curr_hipt	2.7		
Low Current Lo point	Lo_curr_lopt	.5		
Voltage Range	N/A	N/A	61 V/5 A	N/A
Voltage Hi point	Volt_hipt	55		
Voltage Lo point	Volt_lopt	3		
Low Resistance Range	Lo_res_rng	2	15 V/6 A	10 A
Low Resistance Hi point	Lo_res_hipt	1.9		
Low Resistance Lo point	Lo_res_lopt	.067		
Middle Resistance Range	Mid_res_rng	20	10.9 V/8 A	10 A
Middle Resistance Hi point	Mid_res_hipt	60		
Middle Resistance Lo point	Mid_res_lopt	2.1		
High Resistance Range	Hi_res_rng	2002	60 V/5 A	10 A
High Resistance Hi point	Hi_res_hipt	200		
High Resistance Lo point	Hi_res_lopt	24		

SEE CHANGE SHEET

SEE CHANGE SHEET