

Acterna SDA-4040D

Stealth Digital Analyzer

With today's varied networks, a solution that can handle cable modems, digital TV and maintain the analog spectrum is essential. Putting that solution into a single, rugged instrument will enable technicians to use it in the most demanding of situations, whenever it is needed.

The Acterna SDA-4040D Stealth Digital Analyzer is just such a solution. Detecting and eliminating return path noise is accomplished with a fast spectrum analyzer (detects signals down to a 5 μ s duration), and the industry-unique Acterna PathTrak™ Field View option. A zero span spectrum provides accurate, in-service power and carrier-to-noise measurements of cable modems.

The new QAM View digital analysis option adds forward path digital signal testing that includes constellation, pre/post FEC BER, MER, and an exclusive QAM ingress feature that reveals noise under an active carrier. Of course, analog signal measurements are addressed with standard features like RF level, fast-scan, tilt, in-service C/N and HUM, and FCC and CENELEC compliant autotesting.

The Acterna SDA-4040D is an ideal solution for any network. Priced competitively to ensure that on-site technicians are fully equipped with the equipment they need, the SDA-4040D will ensure rapid and accurate analysis of network turn-up or in-service testing for fastest return on revenue.

Highlights

- Offers unmatched measurement performance in a single instrument
- Enables easy preparation of networks for interactive services with a 5 to 1000-MHz fast, sensitive spectrum analyzer
- Provides zero span measurement of power and carrier-to-noise ratios
- Enables analysis and quality measurements of digital TV and cable modem signals with optional QAM analysis
- Ensures full in-service proof of performance with automated tests
- Reduces testing and troubleshooting times for network analysis and qualification
- Rugged, weather-resistant, and lightweight

The Spectrum mode has the speed and versatility to effectively troubleshoot difficult system problems

Acterna single-instrument solutions

The SDA-4040D Stealth Digital Analyzer delivers a single-instrument, “One-Box” solution to help deploy and maintain quality video and data services in the HFC network. With the same durability and measurement accuracy as its proven SAM predecessor, the SDA-4040D is designed with the speed, spectrum, and advanced QAM analysis to test both traditional analog video and the latest digital formats. The versatile combination of standard features and available options enables the meter to be customized, or upgraded to the SDA-5000, to meet virtually any system requirements.

Analog testing

- Nonintrusive Sweepless Sweep
- RF level, fast scan, tilt
- In-service carrier-to-noise, hum, depth of modulation
- Fast spectrum display with CTB/CSO
- Automatic/24-hour testing (FCC and CENELEC compliant)

Return path testing

- PathTrak Field View option pinpoints return path noise
- Zero-Span Spectrum mode
- DOCSIS/DAVIC-compatible cable modem analysis

Advanced digital testing

- digiCheck average power
- QAM View digital analysis option with modulation error ratio (MER), pre/post FEC BER, constellation, and exclusive noise/ingress under the carrier measurement


Preparing the network for digital services

For measurement and analysis of digital TV and forward modem signals, the new QAM View option provides a full complement of digital quality measurements. Included is a 64/256 QAM constellation display with zoom, average digital power level, bit error rate (BER), 21 to 35 dB modulation error ratio (MER) and noise margin “cliff effect” parameter. An equalizer display shows equalizer stress and distance to fault.


In addition, an exclusive QAM Ingress Noise mode enables technicians to see ingress/noise under an active digital carrier. This tool is invaluable for detecting forward path ingress otherwise hidden by conventional spectrum views.

In-service cable modem analyzer


For bursty digital signals such as TDMA technologies used on cable modems for reverse services, the SDA-4040D offers two choices. The first is a one-button cable modem analyzer and the second uses advanced zero span capabilities to make the measurement. The one-button cable modem analyzer quickly shows carrier-to-noise measurements, while the zero span option utilizes a time domain display to enable power measurements while the modem is in service. Both methods are compatible with global cable modem standards.

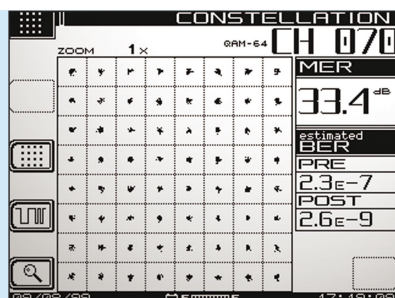

Constellation display with MER and pre/post FEC BER

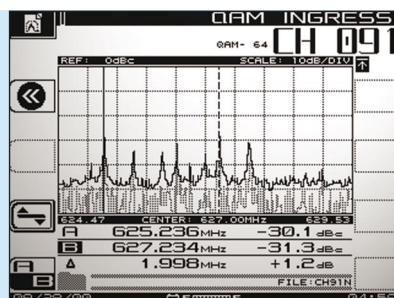

QAM ingress feature shows noise/ingress under an active carrier

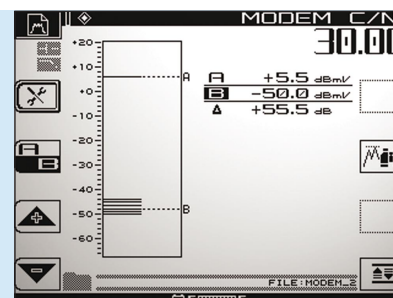

Single button, in-service C/N measurements on TDMA return path cable modem signals (DOCSIS, EuroDOCSIS, EuroModem)

Fast-update spectrum display for detecting ingress in the field

The Spectrum mode has the speed and versatility to effectively troubleshoot difficult system problems. A programmable dwell time enables the meter to stay on each frequency longer to catch more ingress. Peak Hold mode captures and saves transient bursts such as evasive return path electrical noise. The SDA-4040D detects signals as fast as 5 μ s, in both Zero Span and Continuous modes. The preamp and lowpass filter on the SDA-4040D assures that ingress can be measured on devices with bidirectional testpoints or test-point values of 30 dB or more.

PathTrak Field View option

When a network is equipped with the Acterna PathTrak Performance Monitoring System, system technicians can benefit from the ultimate tool to combat ingress – the PathTrak Field View option for the SDA-4040D. With Field View, the SDA-4040D receives a return path headend spectrum broadcast from the PathTrak unit, and then compares it with a return path spectrum at any field test-point. The side-by-side spectrum comparison instantly reveals whether the ingress source is originating at the technician's current testpoint or at a different location.

The comparative spectrum technique reduces noise/ingress troubleshooting time dramatically, since the technician can immediately verify whether corrective action performed in the field (local trace), results in improvement in the headend spectrum (remote trace).

Sweepless Sweep® provides nonintrusive frequency response

The trademarked Sweepless Sweep passively provides frequency response information about a network by measuring active carriers. The SDA-4040D stores the levels of all active carriers at one reference point in the network, and then compares the relative levels to another point within the network; just like referenced sweep, but without the need for a transmitter.

Powerful and intuitive standardized graphical displays

All measurement results are presented to the user in clear, highly informative, summary displays. The graphics present the information in a way that the technician wants to see it with no further interpretation required. For example, testpoint compensation values are entered at the start of testing. Displays then calculate actual levels automatically, minimizing field errors.

Reduced training time


With SDA Series products, all levels of instruments are familiar to the technician regardless of which is learned first because the same user interface conventions are used across all product families. The time needed for a trainee technician to learn to use the instrument is considerably shorter than for alternative test equipment. This means urgent upgrade projects make the most efficient use of limited resources when SDA Series products are used.

Comprehensive testing


The SDA-4040D provides an extensive set of signal analysis features designed for proving and improving network quality. All tests utilize a practical user interface that normally requires only a one-button keystroke.

Level measurement


The SDA instruments provide a comprehensive single-channel display with tuned channel, video frequency and level, audio frequency and level, and the difference between video and audio carrier levels.

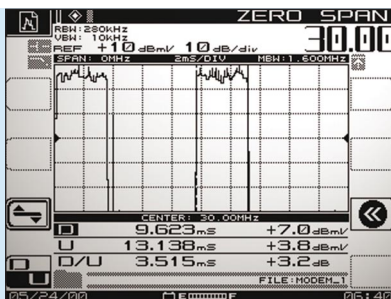

Zero span/time domain expert mode, showing the TDMA bursty return path cable modem power ramp of 3.5 ms

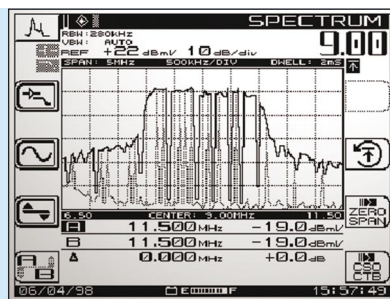

Reverse digital modem signal

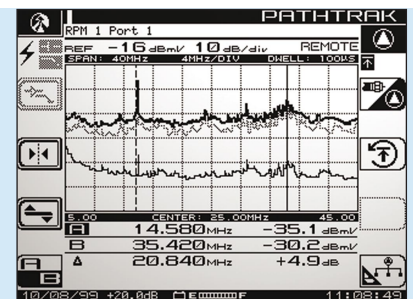

PathTrak Field View option compares headend node spectrum with field testpoint spectrum

Making accurate digital average power measurements is addressed with the digiCheck measurement function. The digiCheck feature is compatible with most non-bursty digital modulations in use today (that is, 16, 32, 64, and 256 QAM, QPR, QPSK, VSB, and CAP16).

Analog and digital signal limits

Analog signal threshold limits have always been a technician's favorite feature of Acterna instruments. Automatic limit checks provide a quick GO/NO-GO status for audio and video levels. The SDA Series extends this capability with a dedicated digital limit set that can be applied exclusively to the forward digital carriers defined in a channel plan. By assigning separate analog and digital limits, test time is reduced, since no calculation is necessary to determine if analog and digital level relationships are within system specifications. Analog and digital limit capabilities are available in both the Scan and Autotest modes.

Tilt measurement

Tilt is the easiest and most efficient tool for balancing amplifiers. For cable plants requiring multiple tilt measurements, such as comparing today's tilt measurement with a historical record, and then making an additional measurement for a new wider channel plan, the technician simply uses markers to indicate the tilt channels that define the new limits.

Intermodulation distortion

Intermodulation distortion (CSO/CTB) can be automatically measured using the CTB/CSO mode from the spectrum analyzer. CTB/CSO distortions produced by intermodulation of analog TV carriers can degrade the signal quality of QAM modulated signals used by digital video and cable modems.

Scan measurement


Scan mode provides a quick graphical view of the entire channel plan with bars representing the video level for each channel. Both video and audio may be displayed.

Carrier-to-noise measurement: in-service


Carrier-to-noise measurement (on non-scrambled channels) is just as easy, and there is no need to remove modulation from the video carrier. No tunable preselector filter is needed.

Hum measurement: in-service


Measuring hum on a channel (non-scrambled) is as simple as pressing the "HUM" key and since the instrument is battery powered, the measurement is independent of ground loops, therefore isolated from the line (mains). Hum reveals itself as either single (60 Hz) or double (120 Hz) horizontal bars across the video screen. The level of either can be measured.

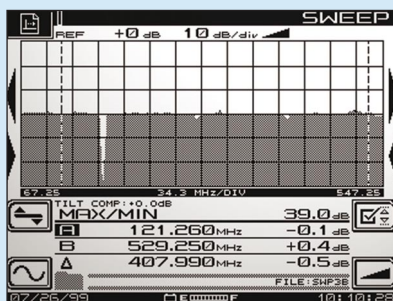


Sweepless Sweep display

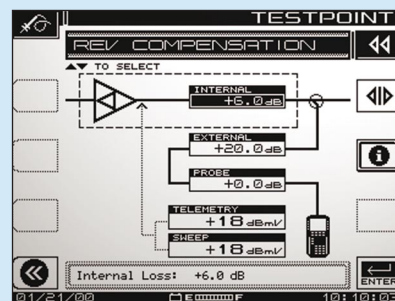


Graphical reverse testpoint compensation

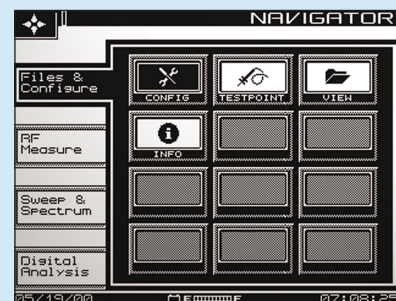


The Navigator user interface, common on all Acterna SDA meters

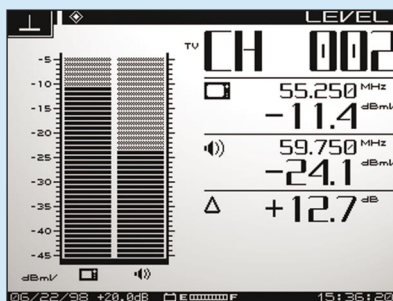

The single-channel level display shows both video and audio levels (either single or dual sound/ NICAM) and the difference between the two

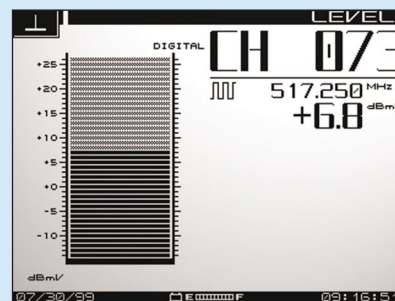

Digital channel average power measurements can be made using the digiCheck™ feature

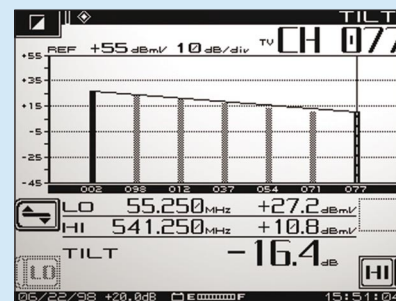

Tilt mode performs automatic tilt calculations between any two of nine designated carriers

Modulation measurement

Includes NTSC, PAL, and SECAM formats. Demodulation of the audio is done for both AM and FM. FM is used to hear audio distortion on the FM radio channels or the sound of the TV program. AM is used to recognize short-wave interference signals in the reverse band.

Extensive automated test capability

Automated tests can be scheduled to perform either 24-hour FCC compliance tests, or initiated immediately to log performance at individual nodes, amplifiers or other testpoints. A wide range of tests can be performed automatically, including signal levels, C/N, hum and depth of modulation. The operator designates which tests to perform on which channels. Because these tests are nonintrusive, it is easy to test all parameters on all channels at any time.

After a test is performed, the results can be displayed on the SDA screen. A PASS/FAIL indication can be set on a variety of limits for FCC/CENELEC or other government standards, or to system preferences. Data taken during any automated test, or sequence of automated tests, can be viewed immediately with a PASS/FAIL indication for each of the limits. Specific stored measurement results may be viewed on demand. Automated test results can be printed directly to a serial printer or uploaded to a PC using StealthWare to store and include in custom reports.


Data analysis with StealthWare

Any stored SDA measurement information can be uploaded to a PC using StealthWare, a Microsoft® Windows®-based data management package. Stored sweep, scan, or spectrum screens can be viewed on the PC and analyzed with marker movement and readout information in just the same way as on the actual instrument.

A sweep graph overlay function enables comparison of multiple RF response variations over time. StealthWare also allows the operator to build channel plans and edit site locations, which can be downloaded to multiple SDA instruments. Additionally, channel plans can be uploaded to the PC, modified in StealthWare, and then downloaded back to the SDA instrument.

Upgrading the SDA-4040D to the SDA-5000

The Acterna upgrade program is designed to protect customers' investment in test equipment. As system requirements change, the SDA-4040D can be upgraded to the SDA-5000 for forward and reverse sweep capabilities at any of Acterna worldwide service centers, and model SAM-4040D owners can upgrade to the SDA-4040D with an in-the-field firmWare change only.

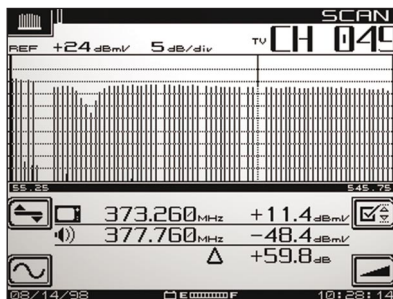


Limit checks can be instantly viewed after identifying channel of interest with a marker in Scan mode display




In-service carrier-to-noise



In-service "HUM" (PAL and NTSC compatible)

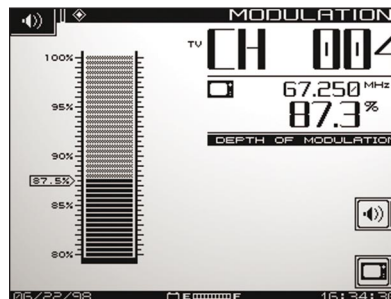

Depth of modulation

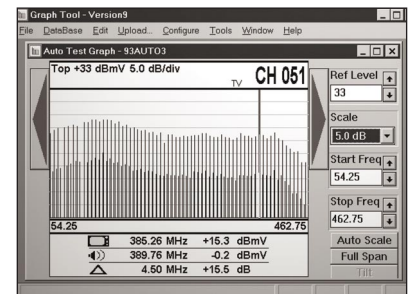

The detailed scan graph offers user-adjustable marker, scale reference level and tilt for maximum signal evaluation

Acterna Basic Service packages

To ensure the highest levels of support for SDA purchasers, Acterna offers the Basic Service for instrument package. Designed to provide the foundation for maximizing the features and usage of SDA equipment, Acterna's Basic Service package offers the following degrees of service and support only Acterna can provide. This includes:


- An extended warranty of up to five years
- Annual calibration fully traceable to meet NIST standards

These core services provide the foundation for a longer product life, help you realize greater meter functionality and maximize your Acterna investment. Ask your sales representative or call the Acterna Customer Care Center for more information.

Technology training

Acterna provides a comprehensive Cable Networks technology training program designed to help you and your teams understand the changing needs of today's advanced networks. Training seminars include:

- HFC basics
- Sweep and balance forward and return
- Sweep 101 "Bootcamp"

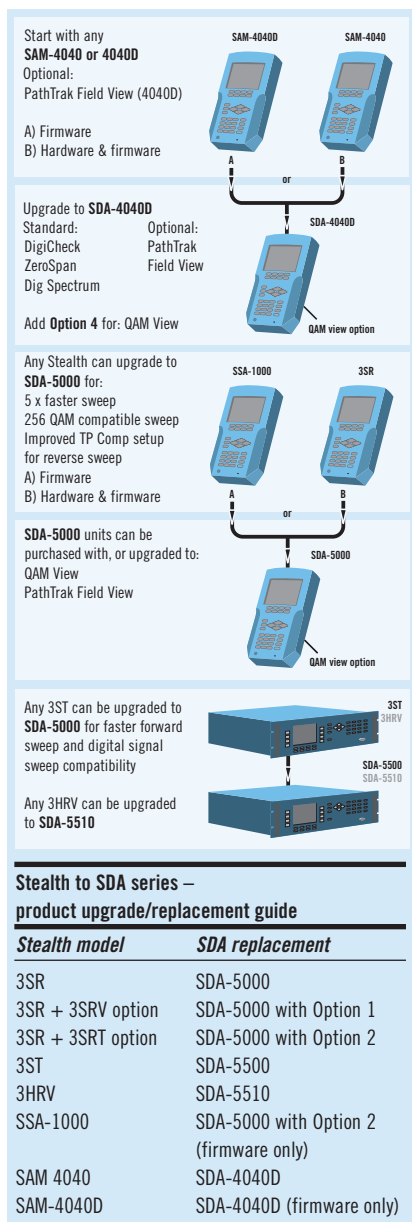

Specifications

General

Display	320 x 240 dot matrix LCD, selectable back light
Dimensions	6 x 11 x 3.5 in (15.2 x 27.9 x 8.9 cm)
Weight	5.1 lb (2.3 kg)
Temperature range operating	–4 to 117°F (–20 to +47°C)

Power sources

Battery	Extended-life replaceable nickel metal hydride, 12V/3.5A-hr 4 hours cont. use on a single charge
---------	--

Frequency

Range	5 to 1,000 MHz
Accuracy	±10 ppm at 25°C; ±10 ppm drift over temperature; ±3 ppm/year aging
Resolution bandwidths	30, 280 kHz and 2MHz (30 kHz for CTB/CSO only)
Tuning resolutions	10 kHz
Sweep resolution	250 kHz maximum

Level measurement

Range	–40 to +60 dBmV
Resolution	0.1 dB
Accuracy	±1.0 dB from –20 to +50°C ^(1,2)
Log linearity	±0.5 dB ⁽¹⁾
Flatness	±0.5 dB ⁽³⁾
Signal types	CW, single carrier, video (single or dual audio/NICAM), audio, digital
Uncertainty for digital carrier	additional ±0.5 dB (digital types 16/32/64/256) QAM, QPR, QPSK, VSB, CAP-16, DVB/ACTS and TDMA using Zero Span Spectrum mode) at 280 kHz RBW

Carrier-to-noise⁽⁴⁾

In-service measurement. Non-scrambled channels only. No preselection required for 78 channels or less. Best dynamic range at +10 dBmV or higher input.	
Range	≥ 52 dB ⁽¹⁾
Resolution	< 0.5 dB

Hum measurement

In-service measurement. Carrier > 0 dBmV. Non-scrambled channels only	
Range	0 to 10%
Resolution	< 0.2%
Accuracy	±0.7%

Depth of modulation

Assumes presence of white reference on any VITS line. Non-scrambled channels only.	
Audio demodulation of AM and FM carriers	
Range	80 to 100%
Resolution	< 0.5% at 85%
Audio demodulation	AM and FM carriers

Tilt measurement

Up to nine pilot carriers or video channels with tilt and level measurements on the highest and lowest.
Hi-Lo Δ Resolution 0.1 dB

Scan mode

All video, audio, pilot carrier, and digital channel levels displayed.

Sweepless Sweep mode

Frequency range 5–1000 MHz
Display span User definable
Display scale/range 6 vertical divisions 1, 2, 5, or 10 dB/division
Sweep pulse occupied bandwidth 30 kHz
Stability ± 0.5 dB, normalized (dependent on stability of referenced carriers)
Sweep rate ~ 1 second (78 Channels, including scrambled and digital signal types)
Channel plan templates (user editable)
China-1; China-2; France; HDTV-NL; Ireland; Japan; Jerold; Jerold-HRC; Jerold-IRC; NCTA; NCTA-HRC; NCTA-SUB; NCTA-IRC; NTSC-Broadcast; OIRT-D/K; PL-B/G; PAL-UK

Spectrum mode

Spans 3, 5, 10, 20, and 50 MHz (0.3, 0.5, 1, 2, and 5 MHz/div.)
Sweep rates ~ 1 second updates with spans of 50, 20, 10 and 5 MHz
 ~ 1.7 second updates with 3 MHz span
Display scaling and range 0.5, 1, 2, 5, and 10 dB/div. 6 vertical divisions
Dwell programmable 0–25 ms
Spurious free dynamic range 60 dB⁽³⁾
Sensitivity without preamp -40 dBmV 5 to 550 MHz
 -35 dBmV 550 to 1000 MHz
Sensitivity with preamp -50 dBmV 5 to 550 MHz
 -45 dBmV 550 to 1000 MHz
Max. level with preamp $+50$ dBmV

Zero Span mode

Video BW > 1 MHz, 100 kHz, 10 kHz, 100 Hz
Resolution BW 2 MHz, 280 kHz, 30 kHz
Measurement BW Compensation programmable 1 kHz to 99 MHz
Pulse measurement accuracy nominal level in 10 μ s
 ± 2 dB from nominal in 5 μ s
(> 1 MHz VBW, 280 kHz RBW)
Sweep times 100 μ s to 20 s (1, 2, 5 settings)

Intermodulation distortion (CSO/CTB)

Range⁽⁵⁾ ≥ 60 dB
Resolution 0.1 dB

Data storage

Files types that can be stored: Sweepless Sweep, autotests, tilt graphs, channel plans, and scan graphs. Spectrum graphs (normal, normal with max hold, and CSO/CTB) can also be stored. Memory space is allocated on demand. All files stored as data, not as screen picture. Typical mix of files

for 78-channel plan, 8 channel plans; 16 sweep references, 80 sweep traces; 40 scan files, 20 spectrum displays; 20 autotests

Serial interface

RS232; Epson, IBM, Seiko, and Diconix printers

Input configuration

Connector type 75 Ω Type F Female
(Optional 75 Ω Type BNC Female)
Maximum sustained voltage 100 VAC, 140 VDC

PathTrak field view (OPT 3 required)

Update rate 2x/second (remote trace)
 ~ 1 x/second (local trace)
Display scaling 5/1/2/5/10/20 dB/div.
Selectable nodes 14 (selectable via PathTrak HCU)

View option (OPT 4)

The QAM View option can be factory installed in any new or existing SDA Series instrument. The specifications and features are in addition to the standard measurement features of the SDA Series. When ordering, please specify OPT 4A for 8MHz, DVB-C, ITU-T J.83 Annex A, or OPT 4B for 6MHz, DVS-031, ITU-T J.83 Annex B.

Modulation type 64/256 QAM, DVB-C, ITU-T J.83 Annex A (OPT 4A)
64/256 QAM, DVS-031, ITU-T J.83 Annex B (OPT 4B)

Channel bandwidth 8 MHz (OPT 4A); 6 MHz (OPT 4B)

Measurable input range (lock range)

64 QAM -20 to $+50$ dBmV (typical)
256 QAM -15 to $+50$ dBmV (typical)

Frequency tuning

50 to 860 MHz (Digital QAM mode)
Resolution 50 kHz

BER (bit error rate)

64 QAM Pre-FEC/OPTs 4A and 4B 10^{-4} to 10^{-9}
64 QAM Post-FEC/OPTs 4A and 4B 10^{-4} to 10^{-9}
256 QAM Pre-FEC/OPT 4A and 4B 10^{-4} to 10^{-9}
256 QAM Post-FEC/OPT 4A and 4B 10^{-4} to 10^{-9}

MER (modulation error ratio)

64 QAM/Option 4A 22 to 35 dB
Accuracy ± 2.0 dB (typical, see chart below)
64 QAM/Option 4B 21 to 35 dB
Accuracy ± 1.5 dB
256 QAM/Option 4A 28 to 35 dB
Accuracy ± 2.0 dB (typical, see chart below)
256 QAM/Option 4B 28 to 35 dB
Accuracy ± 1.5 dB

EVM (error vector magnitude)

64 QAM/Option 4A 1.2% to 5.2%
Accuracy $\pm 0.5\%$ (1.2% to 2.0%)
 $\pm 1.0\%$ (2.1% to 4.0%)
 $\pm 1.4\%$ (4.1% to 5.2%)
64 QAM/Option 4B 1.2% to 5.8%
Accuracy $\pm 0.5\%$ (1.2% to 2.5%)
 $\pm 1.1\%$ (2.6% to 5.8%)
256 QAM/Option 4A 1.1% to 2.5%
Accuracy $\pm 0.6\%$
256 QAM/Option 4B 1.1% to 2.5%
Accuracy $\pm 0.5\%$

QAM level measurement

Signal types 64 QAM, 256 QAM
Range -20 to $+45$ dBmV
Accuracy ± 1.0 dB
Flatness ± 0.5 dB
Linearity ± 1.0 dB
Temperature ± 0.5 dB (typical)

Measurable QAM ingress

64 QAM -25 to -40 dBc
256 QAM -30 to -40 dBc
Accuracy ± 3.0 dB

Graphic display

Digital summary (including MER/EVM, Pre/Post FEC BER, Equalizer Stress, Carrier Offset, Symbol Rate) with limit/margin test results, QAM level. IQ constellation with zoom. Adaptive Equalizer Display (8 feed forward/24 feedback), Frequency Response, Group Delay. Ingress/Noise Under the Carrier.

Power source

Note: Option powered from SDA Series nickel metal hydride battery. Operating time is specified for continuous use in QAM View mode. Option includes high output charger.

Charge time ~ 4 hours
Operating time 2.5 hours continuous use (typical)

Universal AC charger/adaptor

Input 100–250 VAC, 50–60 Hz, 0.5 A
Output Charge 15 V at 750 mA

Physical dimensions

(total SDA-5000 size with OPT 4)
6 x 10.5 x 4.25 in
(15.2 x 26.7 x 10.8 cm)
Weight Approx. 7.7 lb (3.5 kg)
Operating temperature range -4 to 113°F
(-20 to 45°C)


Notes

⁽¹⁾Typical specifications


⁽²⁾Relative to 25°C


⁽³⁾At 25°C and $+20$ dBmV

⁽⁴⁾

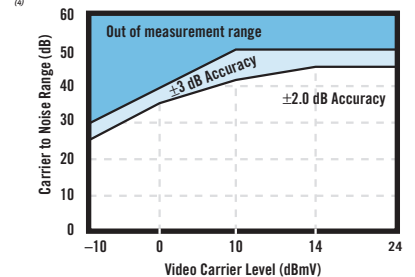

⁽⁵⁾

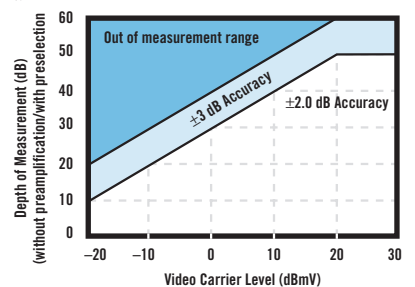

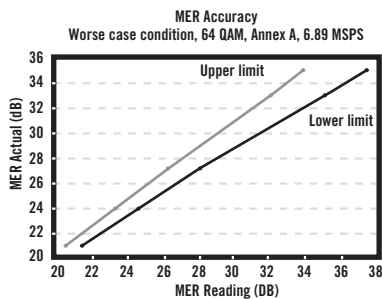

Ordering information

Model SDA-4040D

1010-00-0471

Digital/Analog HFC Analyzer

Includes: Extended-life nickel metal hydride battery, universal charger/AC adapter, canvas carrying case and operator's manual.

Options

1019-00-1290

SDA-OPT3A PathTrak Field View interoperation for model SDA-4040D (requires PathTrak HCU)

QAM View

SDA-OPT4A/B QAM View digital analysis including 64/256 Constellation, MER, Pre/Post FEC BER, and exclusive QAM ingress under the carrier feature. Please specify OPT version 4A or 4B when Ordering (see below part numbers)

1019-00-1287

SDA-OPT4A 64/256 QAM, DVB-C, ITU-T J.83 Annex A (8 MHz)

1019-00-1288

SDA-OPT4B 64/256 QAM, DVS-031, ITU-T J.83 Annex B (6 MHz)

1019-00-1288

SDA-OPT5 BNC connectors replace standard F type connectors

1010-00-0340

StealthWare Windows™-compatible data management software for all SDA, Stealth, MicroStealth, and CLI products.

SDA-4040D QAM Pack

SDA 4040D Stealth Digital Analyzer Package including QAM View Option SDA-OPT4/B

1013-00-0006

SDA 4040D with SDA-OPT4A (8MHz)

1013-00-0005

SDA 4040D with SDA-OPT4B (6MHz)

Optional accessories

1019-00-1298

SDA-CASE1 Replacement soft carrying case for all SDA instruments without QAM View option installed. Compatible with standard and extended life batteries

1019-00-1369

SDA-QAMCASE Replacement soft carrying case for all SDA instruments with QAM View option installed

1019-00-1190

SDA-NIMH Spare extended life battery.

1019-00-1195

SDA-NIMCA Universal charger/AC adapter for extended-life nickel metal hydride battery.

1012-00-0057

SDA-NIMK Extended life battery kit. Includes extended life battery, universal charger/AC adapter, and soft carrying case (SDA-CASE1) (for upgrading units without QAM View Option)

1019-00-1329

CBC-2 In-vehicle charger for SDA NiMH extended life battery only utilizing standard 12V DC automotive accessory port

Acterna AdvantageSM – adding value with global services and solutions

From basic instrument support for your field technicians to management of complex, company-wide initiatives, Acterna's service professionals are committed to helping you maximize your return on investment. Whatever your needs – product support, system management, education services, or business planning and consulting – we offer programs that will give you the competitive edge. This is the foundation of Acterna Advantage.

Acterna is the world's largest provider of test and management solutions for optical transport, access and cable networks, and the second largest communications test company overall. Focused entirely on providing equipment, software, systems and services, Acterna helps customers develop, install, manufacture and maintain optical transport, access, cable, data/IP and wireless networks.

Worldwide Headquarters

12410 Milestone Center Dr.
Germantown, Maryland
20876-7100
USA

Acterna is present in more than 80 countries. To find your local sales office go to:
www.acterna.com

Regional Sales Headquarters

North America

12410 Milestone Center Dr.
Germantown, Maryland
20876-7100
USA
Toll Free: 1 866 ACTERNA
Toll Free: 1 866 228 3762
Tel: +1 301 353 1560x2850
Fax: +1 301 353 9216

Latin America

Av. Eng. Luis Carlos Berrini
936/8° e 9° andares
04571-000 São Paulo
SP-Brazil
Tel: +55 11 5503 3800
Fax: +55 11 5505 1598

Asia Pacific

42 Clarendon Street
PO Box 141
South Melbourne
Victoria 3205
Australia
Tel: +61 3 9690 6700
Fax: +61 3 9690 6750

Western Europe

Arbachtalstrasse 6
72800 Eningen u.A.
Germany
Tel: +49 7121 86 2222
Fax: +49 7121 86 1222

Eastern Europe, Middle East & Africa

Elisabethstrasse 36
2500 Baden
Austria
Tel: +43 2252 85 521 0
Fax: +43 2252 80 727

1st Neopalmivskiy Per.
15/7 (4th floor)
RF 119121 Moscow
Russia
Tel: +7 095 248 2508
Fax: +7 095 248 4189

© Copyright 2002
Acterna, LLC.
All rights reserved.

Acterna, The Keepers of Communications, and its logo are trademarks of Acterna, LLC. All other trademarks and registered trademarks are the property of their respective owners. Major Acterna operations sites are ISO 9001 registered.

Note: Specifications, terms and conditions are subject to change without notice.