

rf/microwave instrumentation

Model 125A400, 125 Watts CW 10kHz-400MHz

The Model 125A400 is a self-contained, air-cooled, broadband, completely solid state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull LDMOS circuitry is utilized in all high power stages in the interest of lowering distortion and improving stability. The Model 125A400, when used with an RF sweep generator, will provide a minimum of 125 watts of swept power.


The Model 125A400 is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the amplifier. The DCP uses a color LCD touch screen and a single rotary knob to offer status reporting and control capability. The display provides operational presentation of Forward Power and Reflected Power plus control status and reports of internal amplifier status. Special features include a gain control, pulse input capability, forward RF sample port, and a reflective RF sample port for precise power measurements.

All amplifier control functions and status indications are available remotely in GPIB/IEEE-488, RS-232, RS-232 fiber optic, Ethernet and USB format. The buss interface connectors are located on the back panel and positive control of local or remote operation is assured by a switch on the front panel of the amplifier.

High efficiency universal input, power factor corrected switching power supplies provides DC to all internal sub-assemblies.

Housed in a stylish, contemporary enclosure, the Model 125A400 provides readily available RF power for typical applications such as RF susceptibility testing, antenna and component testing, watt meter calibration, particle accelerators, plasma generation, communications and use as a driver for higher power amplifiers.

The export classification of this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

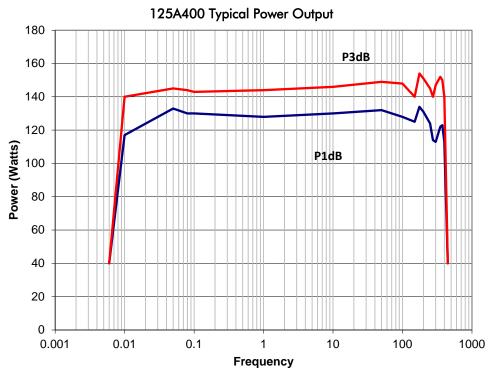

SPECIFICATIONS, MODEL 125A400

5.	20110/11010/1100	
RATED OUTPUT POWER	125 watts minimum	
INPUT FOR RATED OUTPUT	1.0 milliwatt maximum	
POWER OUTPUT @ 3 dB compression Nominal		
POWER OUTPUT @ 1 dB compression Nominal		
FLATNESS	± 2.0 dB maximum	
FREQUENCY RESPONSE	10 kHz–400 MHz instantaneously	
GAIN (at maximum setting)	51 dB minimum	
GAIN ADJUSTMENT (continuous range)	20 dB minimum	
INPUT IMPEDANCE	50 ohms, VSWR 1.5:1 maximum	
OUTPUT IMPEDANCE	50 ohms, nominal	
MISMATCH TOLERANCE	100% rated power without foldback up to 6.0:1 mismatch, above which may limit to 62.5W reflected power. Will operate without damage or oscillation with any magnitude and phase of source and load impedance.	
MODULATION CAPABILITY	Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal	
PULSE MODE GATING CHARACTERISTICS Signal (into 50 ohms)	+3.0 to 6.0 VDC	
HARMONIC DISTORTION	Minus 20 dBc maximum at 75 watts	
THIRD ORDER INTERCEPT POINT	62 dBm typical	
RF POWER DISPLAY	0–200 watts full scale	
PRIMARY POWER	85–264 VAC 47–63 Hz, 600 watts maximum @ 0.99 P.F. typical	
	See Model ConfigurationsSMA female on rear panel (coupling factor 50 dB typical)SMA female on rear panel (coupling factor 50 dB typical)BNC female on rear panel15 pin female Type D on rear panel24-pin female on rear panel9 pin female Type D on rear panel17 pe STType B female	
COOLING	Forced air (self contained fans)	
WEIGHT, maximum	15.9 kg (35 lbs)	
SIZE (W x H x D)	50.3 x 16.3 x 54.9 cm (19.8 x 6.4 x 21.6 in)	
EXPORT CLASSIFICATION	EAR99	
	MODEL CONFIGURATIONS	

MODEL NUMBER	RF INPUT	RF OUTPUT
125A400	Type N female, front	Type N female, front
125A400M1	Type N female, rear	Type N female, rear