



# **100/120 HVT Series**

**AC Hipot Testers** 

■ The HVT Series AC hipot testers are an economical solution to AC field-testing of bucket trucks, aerial platforms, vacuum interrupters, breakers, switchgear, and other electrical apparatus. Models 100HVT and 120HVT offer 100kV or 120kV respectively. Both models are handcart mounted for portability and come complete with input line cord, interconnecting cable and ground leads.

The 100 HVT and 120 HVT series test sets are specifically designed in meeting test procedures of the ANSI/SIA A92.2 1990 specification applied to the insulating boom of work platforms and bucket trucks. The HVT series assures accurate voltage measurements using an external high voltage divider, rather than less accurate primary metering. The HVT series also features a triple range current meter in the return leg of the high voltage transformer for accurate current measurements. A quard circuit prevents stray or surface leakage from being measured by the current meter. To ensure safe operation the unit is equipped with a fast acting circuit breaker, zero start interlock and provision for an external interlock.



#### **FEATURES**

- Compact portable hand cart design
- ☑ Zero start interlock
- ☑ **Single end grounded** high voltage test transformer
- Separate guard and return
- ✓ Metering accuracy ± 2% full scale
- External high voltage divider
- ☑ Triple range voltmeter
- Triple range current meter
- Fast acting overload circuit breaker
- ☑ External interlock provision

## BENEFITS

**Ideal for field testing** – compact, lightweight and rugged makes it suitable for field orientated applications

**Operator Safety** – zero start and external interlock prevents high voltage to be energize until operator is ready

**Simple to Use -** a minimal amount of setup time and a simple control panel allows simple testing every time

Accurate Leakage Current Measurement - while guard circuit eliminates stray leakage currents

Meets ANSI/SIA A92.2 1990 - test specifications

# **APPLICATIONS**

AC Hipot testing of:

- → Aerial platform
- → Bucket truck
- → Vacuum bottles
- → Vacuum interrupters
- → Switchgear
- → Hot sticks
- → Any high voltage AC test requirement (within current limitations)





## **TECHNICAL SPECIFICATIONS**

General 100HVT		120HVT	
Tomak Vallage	120V, 50/60Hz (catalog suffix – A)	1201/ 50/6011- ( A	
Input Voltage	220V, 50/60Hz (catalog suffix -B)	120V, 50/60Hz (-A suffix only)	
Output Voltage	0 –50kV or 0-100kV	0 - 120kV	
Output Current	50mA (100kV tap) 100mA (50kV tap)	10mA	
Voltmeter	0-25/50/100 kV AC 0-30/60/120 kV AC		
Current Meter	0-1/10/100 mA	0250/1/10 mA	
Meter Accuracy	± 2% full scale accuracy		

#### **Weights and Dimensions**

100HVT	17.4"W x 14.5"D x 31.9"H	(441 x 368 x 810mm) Unit weight: 240lbs, Shipping weight: 306lbs
120HVT	17.4"W x 14.5"D x 31.9"H	(441 x 368 x 810mm) Unit weight: 240lbs, Shipping weight: 306lbs

#### SCOPE OF SUPPLY

Oty. 1	AC HV Tan	k with 25	feet (7.6m	) interconnecting	cable
OLY. I	ACTIV Tall	N WILLI Z	166(17,011	/ interconnecting	Cal


- Input line cord, grounded type 10 feet (3 m) Qty. 1
- Qty. 2 Return /ground leads, 25 feet (7.6 m)
- Qty. 2 Shielded interconnecting cable for output current and volt metering 25 feet (7.6m)
- Qty. 1 Interlock plug
- Calibration certificate Qty. 1
- User's Manual Qty. 1

#### ORDERING INFORMATION

System		
120kV @ 1.2kVA	120HVT-A	
50/100kV @ 5kVA	100HVT-A or 100HVT-B	

Accessories		
Spare Parts Kits	SPK1-100HVT or SPK1-120HVT	

### **CONTROL PANEL**

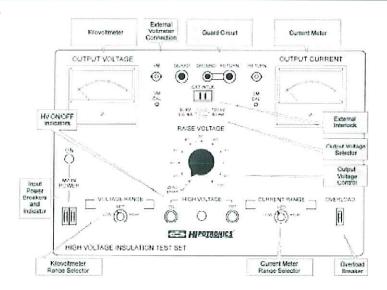

European Contact **Haefely Test AG** Lehenmattstrasse 353 CH-4028 Basel Switzerland 8 + 41 61 373 4111

+ 41 61 373 4912

sales@haefely.com

Locate your local sales representative at www.high-voltage-hubbell.com

**USA Contact** Hipotronics Inc. 1650 Route 22 PO Box 414 Brewster, NY 10509 USA **2** + 1 845 279 8091 + 1 845 279 2467 sales@hipotronics.com









