

**Model 4000W1000**  
**4000 Watts CW**  
**80MHz–1000MHz**


The Model 4000W1000 is a self-contained, air-cooled, broadband, completely solid-state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull circuitry is utilized in all high power stages in the interest of lowering distortion and improving stability. The Model 4000W1000, when used with a sweep generator, will nominally provide over 4000 watts of RF power.

The Model 4000W1000 is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the amplifier. The DCP uses a 4¾ inch diagonal graphic display, menu assigned softkeys, a single rotary knob, and four dedicated switches (POWER, STANDBY, OPERATE and FAULT/RESET) to offer extensive control and status reporting capability. The display provides operational presentation of Forward Power and Reflected Power plus control status and reports of internal amplifier status. Special features include a gain control, internal/external automatic level control (ALC) with front panel control of the ALC threshold, pulse input capability and RF output level protection. Also included is an internal RF detector which provides an output for use in self-testing or operational modes.

All amplifier control functions and status indications are available remotely in GPIB / IEEE-488 format. The bus interface connector is located on the back panel and positive control of local or remote operation is assured by a keylock on the front panel of the amplifier.

Housed in stylish, contemporary equipment racks, the Model 4000W1000 provides readily available RF power for typical applications such as RF susceptibility testing, antenna and component testing, watt meter calibration, and as a driver for frequency multipliers and higher power amplifiers.

**4000W1000 TYPICAL POWER OUTPUT**

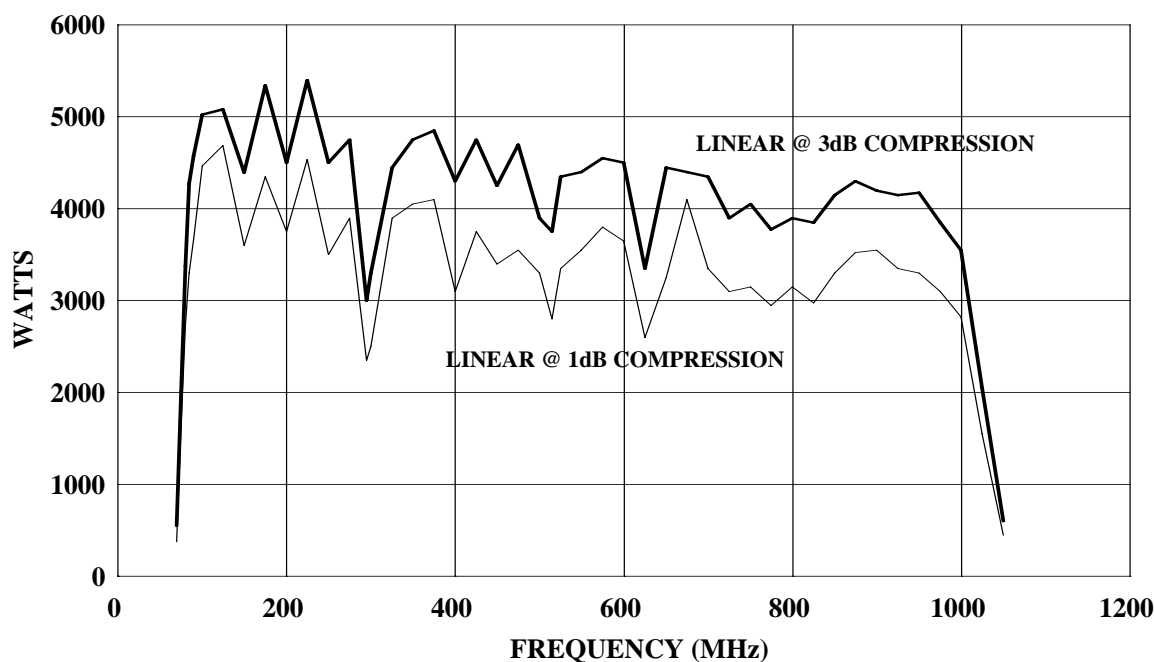

## SPECIFICATIONS, Model 4000W1000

RATED OUTPUT POWER .....	3600 watts minimum
INPUT FOR RATED OUTPUT .....	1.0 milliwatts maximum
POWER OUTPUT @ 3dB compression	
Nominal .....	4400 watts
Minimum .....	2800 watts
POWER OUTPUT @ 1dB	
Nominal .....	3400 watts
Minimum .....	2200 watts
FLATNESS.....	±2.5 dB maximum ±0.8 dB with internal leveling
FREQUENCY RESPONSE .....	80-1000 MHz instantaneously
GAIN (at maximum setting) .....	66 dB minimum
GAIN ADJUSTMENT (continuous range).....	18 dB minimum
INPUT IMPEDANCE.....	50 ohms, VSWR 2.0:1 maximum
OUTPUT IMPEDANCE .....	50 ohms, VSWR 2.0:1 typical maximum
MISMATCH TOLERANCE * .....	50% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance.
MODULATION CAPABILITY .....	Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal
HARMONIC DISTORTION .....	Minus 20 dBc maximum at 2800 watts
THIRD ORDER INTERCEPT POINT .....	73 dBm typical
RF POWER DISPLAY .....	0-6000 watts
PRIMARY POWER (specify voltage).....	200-250 VAC, Delta Connected (4 wire) 360-435 VAC, Wye Connected (5 wire) 50/60 Hz, 3 phase 48 kVA Maximum
CONNECTORS	
RF input .....	Type N female on rear panel
RF output .....	Type 1 5/8 EIA on top panel
External leveling inputs .....	Type BNC female on front panel
Pulse modulation input .....	Type BNC female on front panel
Detected RF output .....	Type BNC female on front panel
Safety interlock.....	15 pin female subminiature D on rear panel
Remote control .....	24 Pin female GPIB/IEEE-488 and 9-pin RS-232 connectors on rear panel
Remote control (fiber optic) .....	ST connector. Tx and Rx RS-232
COOLING.....	Forced air (self contained fans)
WEIGHT (approximate) .....	1542 kg (3400 lb)
SIZE (WxHxD) (5 cabinets).....	(See outline drawing #1013732) 340 x 158 x 163 cm (134 x 62 x 64 in)

See Application Note #27