
Environmental Requirements

Table 2-1 Environmental Requirements

Parameter	Limits
Operating temperature	+20 °C to +26 °C (+68 °F to +79 °F)
Storage temperature	−40 °C to +75 °C (−40 °F to +167 °F)
Altitude	
Operation	< 4,500 meters (≈15,000 feet)
Storage	< 4,500 meters (≈15,000 feet)
Relative humidity	Always non-condensing
Operation	Up to 80% at 30°C
Storage	Up to 95% at 40°C

Electrical Specifications

Table 2-2 Electrical Specifications

Cable	SWR	Return Loss (dB)	Insertion Loss (dB) ^a	Frequency Range (GHz)
85133C	≤1.432	≥15	≤0.84 √f + 0.3	DC to 50
85133D			≤0.55 √f + 0.2	
85133G				

a. f = frequency in GHz.

Supplemental Characteristics

Table 2-3 lists supplemental performance characteristics. These are not specifications, but are intended to provide additional information useful to your application. Supplemental characteristics are typical (but not warranted) performance parameters.

Table 2-3 Supplemental Characteristics (1 of 3)

Cable	Cable Length		Approximate Electrical Length		Magnitude and Phase Stability With a 90° Bend ^a	Random Use Magnitude and Phase Stability ^b	Minimum Recommended Bend Radius	
	cm	in	cm	in			cm	in
85133C	81	32	115	45.276	<0.06 dB Change <0.18° (f) ^c + 0.8°	<0.03 dB Change <0.14° (f) ^c + 0.8°	10.2	4
85133D	53	21	73.7	29.016	<0.06 dB Change <0.18° (f) ^c + 0.8°	<0.03 dB Change <0.14° (f) ^c + 0.8°		
85133G								

a. With a 90°, four-inch bend radius.

b. After three 90°, four-inch bend radius/straighten cycles.

c. (f) = frequency in GHz.

Table 2-3 Supplemental Characteristics (2 of 3)

Cable Set	Number of Cables	Test Set End Connector Type	DUT End Connector Type
85133C	1	NMD-2.4 mm -f- Slotted	PSC-2.4 mm -f- Slotless
85133D	2	NMD-2.4 mm -f- Slotted	NMD-2.4 mm -m- and PSC-2.4 mm -f- Slotless
85133G	1	NMD-2.4 mm -f- Slotted	NMD-2.4 mm -m-


Center Conductor Pin Depth

Center conductor pin depth is the distance the center conductor mating plane differs from being flush with the outer conductor mating plane. See Figure 2-1 The pin depth of a center conductor can be in one of two states: either protruding or recessed.

Protrusion is the condition in which the center conductor extends beyond the outer conductor mating plane. This condition will indicate a positive value on the connector gage.

Recession is the condition in which the center conductor is set back from the outer conductor mating plane. This condition will indicate a negative value on the connector gage.

Figure 2-1 Connector Center-Conductor Pin Depth

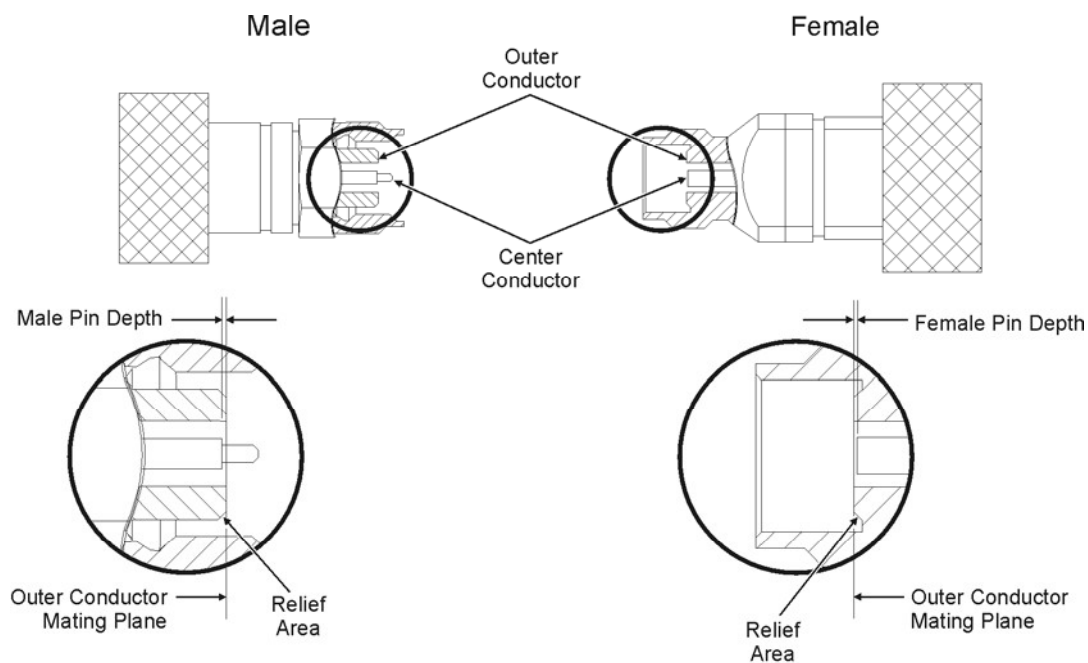

conn185_new

Table 2-3 Supplemental Characteristics (3 of 3)

Precision Connector	Center-Conductor Pin Depth			
	Allowable Recession ^a		Allowable Protrusion	
	mm	in	mm	in
NMD-2.4 mm -f-	-0.000 to -0.056	-0.000 to -0.0022	0.0000	0.0000
NMD-2.4 mm -m-	-0.0025 to -0.0127	-0.0001 to -0.0005		
PSC-2.4 mm -f-	-0.0025 to -0.0127	-0.0001 to -0.0005		

a. Center conductor shoulder behind outer conductor mating plane.