


Agilent E3242A

4-Channel Charge/Voltage Breakout Box

Product Overview

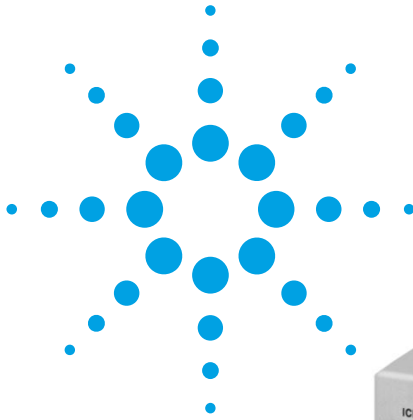

The Agilent E3242A
4-Channel,
Charge/Voltage
Breakout Box

Transducer Signal Conditioning Accessory for the Agilent E1432A and E1433A VXI Digitizer Modules

This Breakout Box accessory is specifically designed to interface accelerometers (charge mode and 4 mA constant current power supply) to Agilent's high performance E1432A and E1433A VXI Digitizer modules. It integrates 4 channels of signal conditioning in one box, reducing the count of transducer conditioning equipment needed for both small and large channel-count VXI systems. This unit has two input connector types per channel to match the intended transducer connection, as well as buffered outputs via BNC connectors for signal monitoring or recording.

The E3242A is dedicated for use with the E1432A and E1433A only and is specifically designed for mechanical measurements by providing 4 separately programmable signal conditioning inputs. Input connectors for each

channel are via a BNC for voltage or 4 mA constant current power supply, and a microdot for Charge mode accelerometers.

Remote Control Features


The E3242A is remote programmable allowing you to set up each channel's parameters through your application software. No longer will you have to manually set up your signal conditioning! Each channel can be programmed for float or grounded input which connects the BNC shell to chassis ground, or allows for a differential input. The charge amplifier gains can also be programmable and a 2 kHz low pass filter can be switched in or out.



Agilent Technologies

Innovating the HP Way

Figure 1
Agilent E3242A
Block Diagram
1 of 4 identical
channels shown

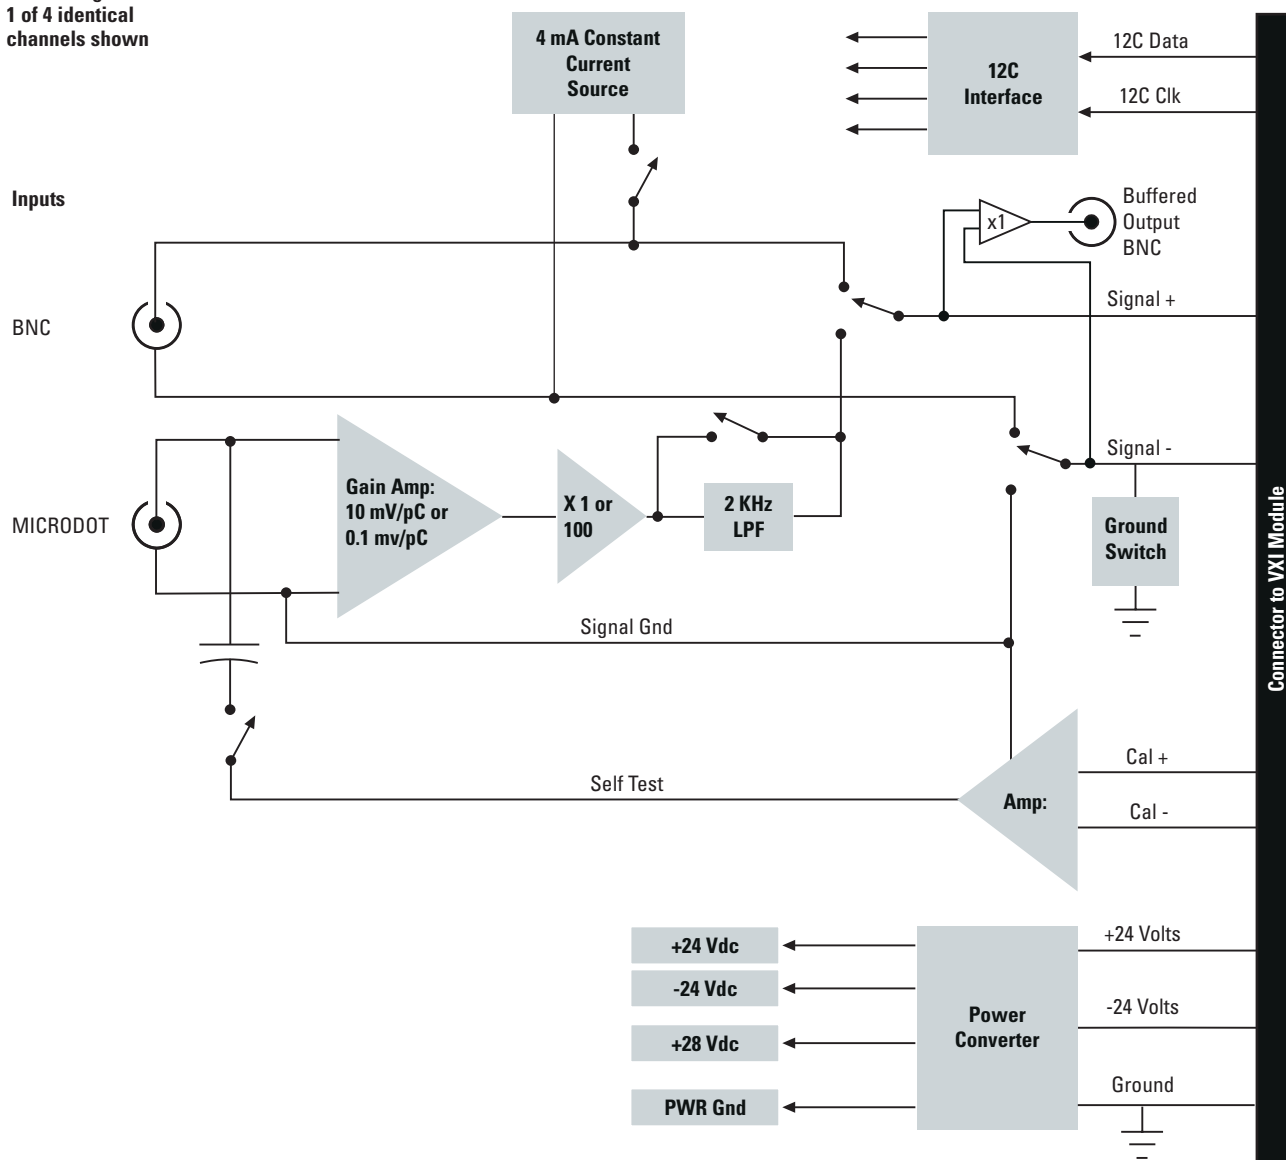

Configuration and Connectivity Information

The E3242A 4-Channel Charge/Voltage Breakout Box is available in only one configuration, and is designed for use only with the E1432A and E1433A VXI Digitizer modules. Supplied with the unit is a 2m cable for connecting to an E1432A or an E1433A VXI Digitizer module.

Warranty Information

The E3242A comes with a three year warranty. During that period, the unit will either be replaced or repaired, at Agilent's option, and returned to the customer without charge. There is an option available at extra cost which extends the repair support to five years.

Accessories Available

A rack-mount kit is available which will allow two E3242A units to be installed side-by-side into a standard 19" system rack. Order Option AXR for every two units to be rack mounted.

General Characteristics for the Agilent E3242A

Number of channels	Four
Transducer connectors	One female BNC and one Microdot connector for each channel
Buffered Outputs	Each channel has a buffered output available on the rear panel via BNC connector
Cable to VXI module	One 2-meter cable
Mechanical dimensions	
Width	174 mm
Height	39 mm
Depth	190 mm
Weight	1.5 kg, not including cable

Options

Opt. AF5	Extra 2 meter cable
Opt. AFL	20 meter cable
Opt. AXR	Rack mount kit

Ordering Information

Agilent E3242A	4-Channel Charge/Voltage Breakout Box
Opt. AF5	Extra 2 meter cable
Opt. AFL	20 meter cable
Opt. AXR	Rack mount kit

Related Agilent Literature

Agilent E1432A/33B/34A Product Overview
Publication number 5968-8729E

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

For More Assistance with Your Test & Measurement Needs go to

www.agilent.com/find/assist

Or contact the test and measurement experts at Agilent Technologies
(During normal business hours)

United States:
(tel) 1 800 452 4844

Latin America:
(tel) (305) 267 4245
(fax) (305) 267 4286

Canada:
(tel) 1 877 894 4414
(fax) (905) 206 4120

Australia:
(tel) 1 800 629 485
(fax) (61 3) 9272 0749

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

New Zealand:
(tel) 0 800 738 378
(fax) 64 4 495 8950

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Asia Pacific:
(tel) (852) 3197 7777
(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.
Copyright © 1998, 2000 Agilent Technologies
Printed in U.S.A. 5/00
5966-3060E



Agilent Technologies

Innovating the HP Way