



PSM-Series




Patent No: ZL 03 3 01174.5

FEATURES

- * Single Output Dual Range Max. 200W
- * High Resolution: 1mV/1mA
- * Stable & Clear Power: 0.01% Load/Line Regulation, 350µVrms Ripple
- * 100 Sets Memory
- * Auto Step Running With Time Setting
- * Safety Design: OVP, OCP & OTP ; Output ON/OFF Control(OCP Provides Delay Setting to Prevent Trip of High Start-Up Current)
- * Self-Test and Software Calibration
- * High Visible Vacuum-Fluorescent Display
- * Front and Rear Output Terminal
- * Standard Interface : RS-232C, GPIB
- * Option : European Jack Type Terminal

Rear Panel

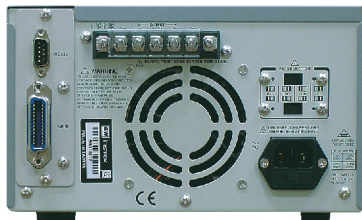

The PSM Series is single output / dual range, 120 or 200W, programmable linear DC power supply OVP, OCP, OTP, and output On/Off control protect PSM and loads from unexpected conditions. High resolution, high regulation, low ripple are maintained at 1mV/1mA, 0.01%, and less than 350µVrms, respectively. VFD panel with simultaneous view of output and parameter setting provide comfortable operation. Configuration is simplified with output limit store/recall function and Auto step running feature for continuous testing. Self-test and software calibration features reduce maintenance overhead. SCPI command set and Labview driver access through RS-232C or GPIB interface provide remote control and ATE software development capability. The PSM Series is an ideal choice for high precision, high reliability application such as QA verification and R&D.

SPECIFICATIONS				
		PSM-2010	PSM-3004	PSM-6003
DC OUTPUT				
Low Range		0 ~ 8V/20A	0 ~ 15V/7A	0 ~ 30V/6A
High Range		0 ~ 20V/10A	0 ~ 30V/4A	0 ~ 60V/3.3A
CONSTANT VOLTAGE OPERATION				
Regulation + (% of output + offset)		Load regulation ≤ 0.01% + 2mV Line regulation ≤ 0.01% + 2mV		
Ripple & Noise		< 350 μVrms/3mVpp	< 350 μVrms/2mVpp	<50V:<500 μVrms/3mVpp >50V:<1mVrms/3mVpp
CONSTANT CURRENT OPERATION				
Regulation + (% of output + offset)		Load regulation ≤ 0.01% + 250 μA Line regulation ≤ 0.01% + 250 μA		
Ripple & Noise		< 2mArms		
RESOLUTION				
Programming	Voltage	1mV	1mV	2mV
	Current	1mA	0.5mA	0.5mA
Readback	Voltage	0.5mV	0.5mV	1mV
	Current	1mA	0.1mA	0.5mA
Front Panel	Voltage	1mV		
	Current	1mA(<10A),10mA(≥10A)		
OVP/OCP	Voltage	10mV		
	Current	10mA		
ACCURACY				
Programming	Voltage	0.05% + 10mV		
	Current	0.2% + 10mA		
Readback	Voltage	0.05% + 5mV		
	Current	0.15% + 5mA		
OVP/OCP	Voltage	0.1% + 10mV		
	Current	0.4% + 10mA		
TRANSIENT RESPONSE				
		< 50μ sec. (for output to recover to within 15mV following a change in output current from full load to half load)		
COMMAND PROCESSING TIME				
		100 ms		
VOLTAGE PROGRAMMING RESPONSE TIME (for resistive load)				
Voltage Up	Full Load	95 ms	50 ms	80 ms
	No Load	45 ms	20 ms	100 ms
Voltage Down	Full Load	30 ms	45 ms	30 ms
	No Load	450 ms	400 ms	450 ms
STABILITY (% of output + offset)				
Voltage		0.02% + 1mV		
	Current	0.1% + 1mA		
MEMORY				
Store/Recall		100 sets		
TEMPERATURE COEFFICIENT PER °C ± (% of Output + Offset)				
Voltage		0.01% + 3mV		
	Current	0.02% + 3mA		
POWER SOURCE				
AC 100V/120V/220V±10% , 230V : - 6% ~ + 10% , 50/60Hz				
INTERFACE				
Standard RS-232C , GPIB				
DIMENSIONS & WEIGHT				
230(W) x 140(H) x 380(D) ; Approx. 10kg				

ORDERING INFORMATION

PSM-2010 200W Single Output, Programmable Power Supply
PSM-6003 200W Single Output, Programmable Power Supply
PSM-3004 120W Single Output, Programmable Power Supply

ACCESSORIES :

User manual x 1, Power cord x 1,
 Test lead GTL-104 x 1 , European test lead GTL-204 x 1,
 Ground lead GTL-201A x 1 (European terminal), Sense lead GTL-202 x 1 (European terminal)

Option

Opt. 01: GRA-407 19", 4U Rack Mounting (19" , 4U)

Optional Accessories

GTL-232 RS-232C Cable, 9-pin Female to 9-pin , Null Modem for PC Computer