

DUAL WIDTH ADAPTORS

The following accessories fit the side-byside terminals on test fixtures of the 576, 576/172, and 577/177 Curve Tracers.


A. Transistor Adaptor — Useful for most single and dual bipolar transistors and some MOS FETs. Order 013-0098-02

B. FET Adaptor - Useful for most single and dual FETs. Order 013-0099-02

C. Long Lead Transistor Adaptor - Accepts dual or single transistors with untrimmed leads. Order 013-0102-00

D. Long Lead FET Adaptor --- Accepts dual or single FETs with untrimmed leads. Order 013-0103-00

E. Integrated Circuit Adaptor — Allows connection to multipin device packages. The appropriate multilead socket is plugged into the integrated circuits adaptor. The pins are then connected to the collector, base, or emitter terminals by means of the patch cord. A tie point is also provided so that an external power supply or signal source may conveniently be patched to the IC pins. Order the appropriate multilead socket listed separately. Includes ten each 4 inch test leads (012-0310-00). Order 013-0124-03.

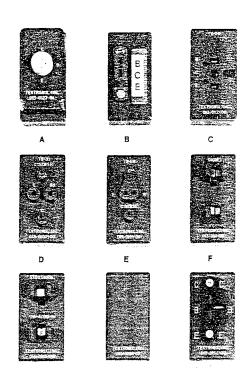

KELVIN SENSING ADAPTORS

The following accessories fit the test fixtures of the 576, 576/172, 576/176, and 577/177 Curve Tracers.

\$85

\$100

\$60

\$120

A. Transistor Adaptor - Accepts long or short transistors. Can be rewired to accommodate nonstandard configurations. Order 013-0127-01

B. In-Line Adaptor — Accepts large and small transistors with in-line leads. The adaptor will accept devices with approx spacing between terminals of 0.06 in up to 0.18 in. It is wired for a B-C-E terminal configuration but may be easily rewired for the C-B-E configuration.

Order 013-0138-01 \$230

\$230

\$230

\$205

C. TO36 Adaptor - Order 013-0112-00

D. TO3 Adaptor - Can be rewired to accommodate nonstandard configurations. Or der 013-0100-01

E. TO66 Adaptor — Order 013-0101-00

F. Axial Lead Diode Adaptor ---Order 013-0111-00

G. Stud Diode Adaptor -Order 013-0110-00

H. Blank Adaptor - For mounting special \$415 sockets. Order 013-0104-00


> I. Power Transistor Adaptor -Order 013-0163-00












MULTILEAD SOCKETS

These sockets are used with the Integrated Circuit Adaptor (013-0124-03) listed under Dual Width Adaptors, and with the 178 Test Fixture.

A. 8 Lead TO Package — Order 136-0444-00	\$39
B. 10 Lead TO Package — Order 136-0441-00	\$46
C. 14 Lead Dual-in-line Package — Order 136-0443-00	\$46
D. 16 Lead Dual-in-line Package — Order 136-0442-00	\$44

These four sockets are the most commonly required in curve tracer applications. Additional socket configurations, including zero insertion style, are available from Textool Products, Inc., 1410 W. Pioneer Dr., Irving, TX



3-PIN ADAPTORS

The following 3-pin adaptors may be used with any of the Tektronix curve tracer products. They do not have Kelvin sensing

CUHIACIS.	
A. TO5 or TO18 — Transistor Adapter. Order 013-0128-00	\$40
B. Blank Adaptor — For mounting special sockets. Order 013-3073-90	\$19
C. TO3 or TO66 — Transistor Adaptor Croer 013-0070-01	\$44
D. Diode Test Adaptor — moids axialread in case Corner 213-3072-30	\$ 92